


# Application Description

## DUST REMOVAL COATING PROCESS



**Xstream** high velocity non contact surface cleaning technology with AUTO<sup>DC</sup> ionisation system

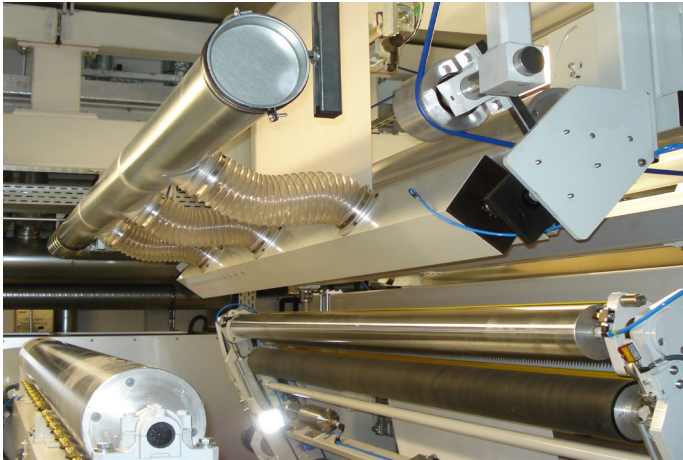

**Application Information**  
**DUST CONTROL**

# Application Description

During the display and optical film coating process it is absolutely essential that the film is 100% clean prior to coating. Any remaining dust or particles would be trapped inside the coated layer and have a massive negative effect of the functionality of the film. Our **Xstream** technology guarantees a non contact cleaning for this process with outstanding efficiency.

## Key Features:

- Any film thickness down to 5µm
- 100% cleaning down to 1,5µm
- Fully automated including AUTODC ionisation
- All parameters and system efficiency visualized

## Our product is ideal for many applications:

- PE
- PET
- COP
- OLED
- ... and may more

Find out more @

<https://www.hildebrand-technology.com/en/products/surface-cleaning-dust-removal/web-cleaning-system-xstream>

